

(12) UK Patent Application (19) GB (11) 2 334 299 (13) A

(43) Date of A Publication 18.08.1999

(21) Application No 9902916.7

(22) Date of Filing 09.02.1999

(30) Priority Data

(31) 09022190 (32) 11.02.1998 (33) US

(71) Applicant(s)

Peter Stuart Foy
Foy Invenrprises Inc., 3275 East Patrick Lane,
Las Vegas, NV 89120, United States of America

(72) Inventor(s)

Peter Stuart Foy

(74) Agent and/or Address for Service

Baron & Warren
18 South End, Kensington, LONDON, W8 5BU,
United Kingdom

(51) INT CL⁶

A44B 11/25

(52) UK CL (Edition Q)

E2A ACAK A106 A160 A184

(56) Documents Cited

GB 2182094 A GB 1528750 A GB 1448526 A
GB 0861465 A US 4587695 A

(58) Field of Search

UK CL (Edition Q) E2A ACAK
INT CL⁶ A44B 11/25 , A61H 3/00 , A63J 5/12

(54) Abstract Title

Load suspension cable release

(57) Apparatus 3 for suspending a load, in particular a person, from a cable 4 comprises a harness plate 5 adapted to be secured to a harness for supporting the person. The harness plate 5 includes a locking mechanism comprising two locking members 6,7 spaced apart to define a through-aperture 8, resilient means 11,12 arranged to resiliently bias the locking members 6,7 towards each other to substantially close the through-aperture 8, and user-operable means 13,14 arranged to move the locking members 6,7 against the resilient bias. The apparatus also includes a cable spade 17 having a first part 18 adapted to be attached to the cable 4 and a second part 21 shaped for insertion into the through-aperture 8 and retention therein by the locking members 6,7. Insertion of the spade 17 into the through-aperture 8 initially moves the locking members 6,7 apart against the resilient bias to open the through-aperture 8 and then permits the resilient means 11,12 to return the locking members 6,7 so as to securely retain the cable spade 17 in the through-aperture 8. The cable spade 17 is releasable from the through-aperture 8 by the user-operable means 13,14.

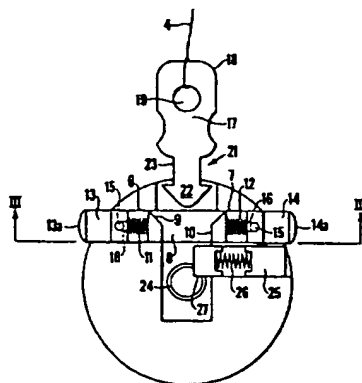


Fig.3a




Fig.3b

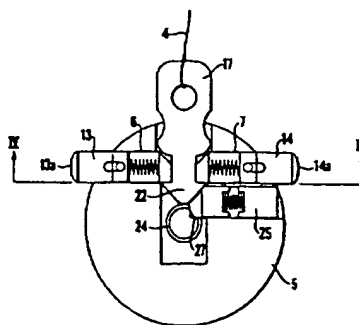


Fig.4a

GB 2 334 299 A

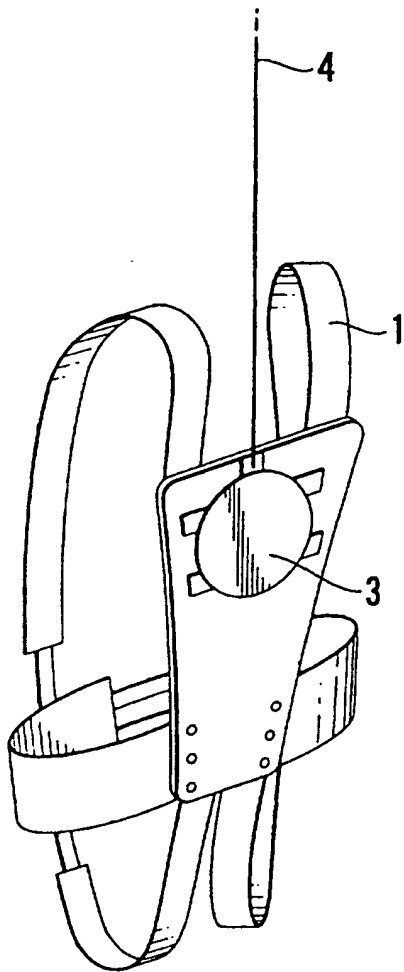


Fig. 1

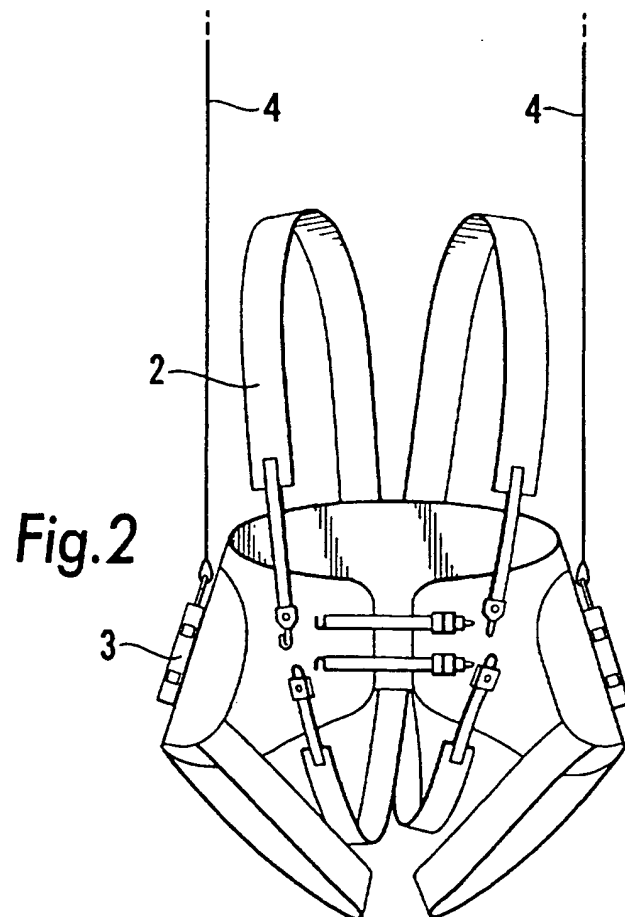


Fig. 2

2/5

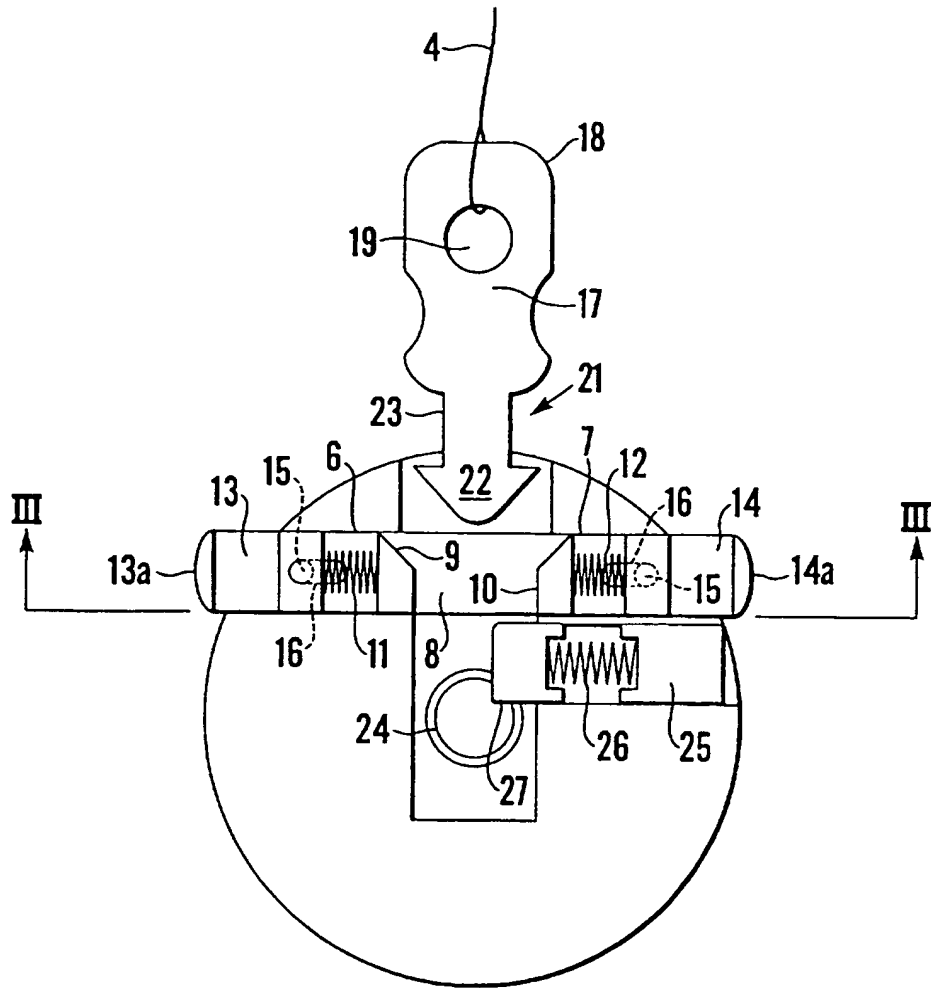


Fig. 3a

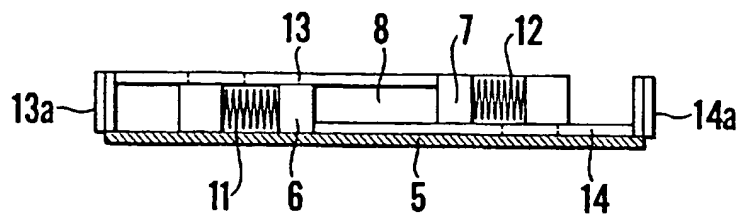


Fig. 3b

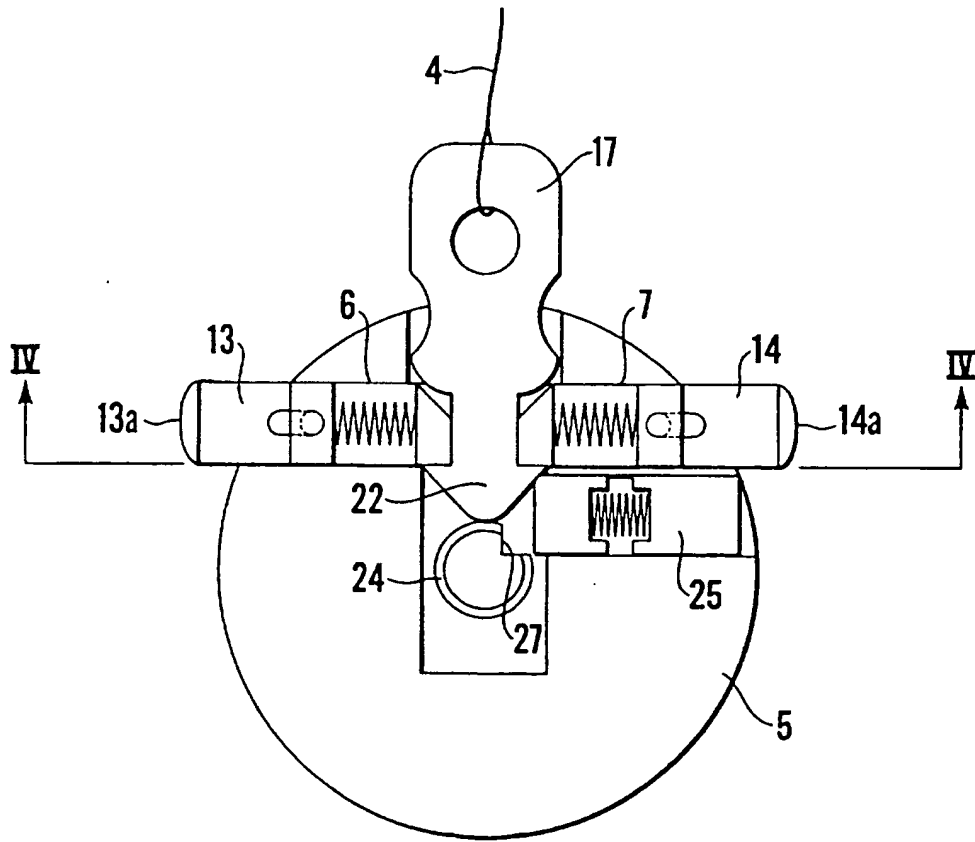


Fig. 4a

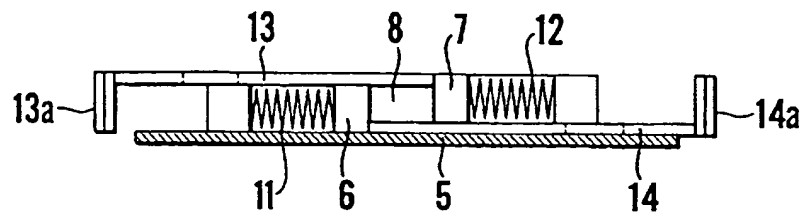


Fig. 4b


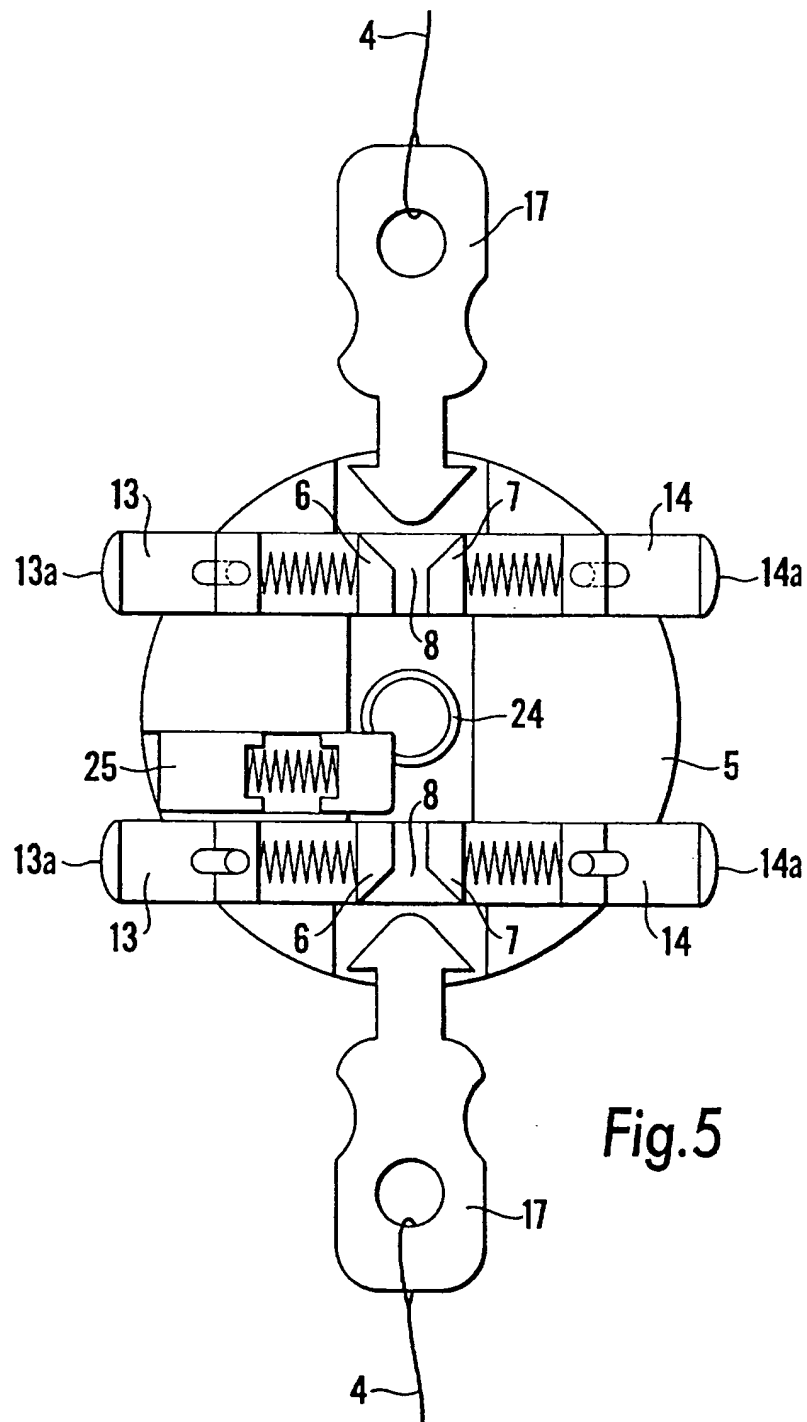


Fig.5

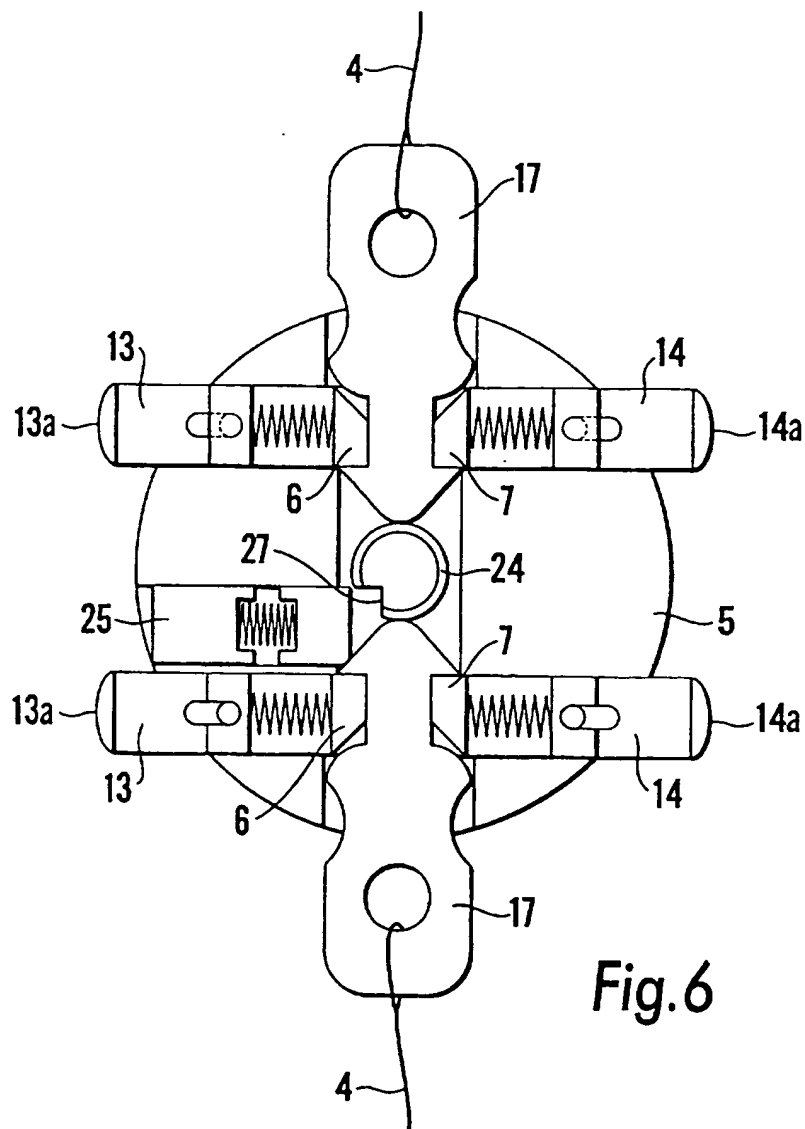

APPARATUS FOR SUSPENDING A LOAD

This invention relates to apparatus for suspending a load, in particular a harnessed person or article, from a suspension wire or cable and is more particularly, but not exclusively, concerned with such apparatus for use in theatrical or stage work where a person needs to be suspended, for example, in theatrical "flying".

It is known to suspend performers from overhead wires or cables by means of a shoulder or body harness shackled to the end of a support wire or cable. Such known flying equipment has the capability to rotate a person through 180° or more, to move a person around a stage area and to lift and lower the person. A harness plate for this purpose is disclosed in US Patent No 4,724,587 to Foy, and is intended to be securely attached to a harness. The harness plate comprises a toroidal passage open at one end facing an upper edge of the plate, a shackle staple having a pair of upwardly extending arms with opposed apertures, and a toroidal shackle pin resiliently mounted by a compression spring in the passage and biased such that the free end of the pin passes through the arm apertures. A finger-like projection on the pin is operated to retract the pin into the passage against the action of the spring and to allow the eye of a suspension cable to be positioned between the arms. When the pin is released, its free end passes through the eye and thereby secures the harness plate to the cable. In order to remove the harness plate from the cable, the pin is again retracted against the action of the spring. However, this method of attaching and detaching the cable may not be particularly easy to carry out quickly and unobtrusively by the performer during an on-stage performance.

It is therefore an object of the present invention to provide an improved apparatus for suspending a load, in particular a person, which enables quick and discreet

attachment and detachment of the suspension cable.

According to the invention there is provided apparatus for suspending a load, in particular a person, from a cable, said apparatus comprising:-

5 a harness plate adapted to be secured to a harness for supporting said load, said harness plate including a locking mechanism comprising at least one locking member, a through-aperture defined by said at least one locking member, resilient means arranged to resiliently bias said at
10 least one locking member to substantially close said through-aperture, and user-operable means arranged to move said at least one locking member against the bias of said resilient means; and cable attachment means having a first part adapted to be attached to said cable and a second
15 part shaped for insertion into said through-aperture and retention therein by said at least one locking member,

 whereby insertion of said second part initially moves said at least one locking member against the bias of said resilient means to open said through-aperture and then
20 permits said resilient means to return said at least one locking member so as to securely retain said cable attachment means in said through-aperture, said cable attachment means being releasable from said through-aperture by said user-operable means.

25 In a preferred embodiment, the locking mechanism comprises two locking members adapted to move towards and away from each other and being spaced apart so as to form said through-aperture therebetween. The resilient means may be adapted to bias said locking members towards each other
30 to substantially close said through-aperture and said user-operable means may be adapted to move said locking members apart against the bias of said resilient means. The locking members are preferably located on first and second sides of said through-aperture respectively, and the user-operable
35 means may comprise slidable members connected to said locking members and extending outwardly with respect to

said plate, the slidable member connected to the locking member on said first side extending outwardly on said second side and the slidable member connected to the locking member on said second side extending outwardly on said first side, such that sliding said slidable members towards each other causes said locking members to move away from each other and thereby to open said through-aperture.

The second part of said cable attachment means may have a substantially triangular head and a neck such that said head can be inserted through said through-aperture and said locking members are resiliently biased to engage against said neck to securely retain said cable attachment means.

Preferably, the harness plate has a rotationally symmetrical shape and is adapted to be rotatably mounted on a harness, and means are provided to inhibit rotation of said plate unless said cable-attachment means are inserted through said through-aperture. The means to inhibit rotation may comprise a stop member including resilient means biased to inhibit said rotation, said cable attachment means being adapted to move said stop member against the bias of said resilient means to release said plate for rotation.

In one example, two of said locking mechanisms are provided on opposite sides of said harness plate, such that two loads can be suspended one above the other.

The invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

Figure 1 shows a schematic perspective view of a harness incorporating a harness plate in accordance with the invention;

Figure 2 shows a schematic front view of another harness incorporating two of said harness plates;

Figure 3a shows a schematic view of one embodiment of the invention, in an unlatched or open state;

Figure 3b shows a schematic sectional view through III-III in Figure 3a;

Figure 4a shows a schematic view of the embodiment shown in Figure 3a, but in a latched or closed state;

Figure 4b shows a schematic sectional view through IV-IV in Figure 4a; and

5 Figures 5 and 6 show schematic views of another embodiment of the invention in an unlatched and a latched state, respectively.

Figures 1 and 2 show two examples of a harness 1,2, to which apparatus 3, in accordance with the present invention, can be securely attached. Each harness 1,2 is intended to be fitted around a person (not shown) to be supported. In the first example, the harness 1 has one apparatus 3 attached to the back of the harness so that the harnessed person is supported by a single cable 4. In the second example, the harness 2 has an apparatus 3 on each side, so that the harnessed person is supported by two cables 4.

Figures 3 and 4 show a first embodiment of the apparatus 3, which is intended to suspend a single person. The apparatus 3 comprises a generally circular harness plate 5 upon which two locking members 6,7, forming a locking mechanism, are slidably mounted. Each locking member 6,7 is biased by a compression spring 11,12 to substantially close a through-aperture 8 formed between inner ends 9,10 of the locking members 6,7. The locking members 6,7 are connected to slides 13,14, respectively, the outer ends 13a,14a of which may be formed with finger grips to enable the slides to be squeezed towards each other as described hereinbelow.

As can be seen from Figures 3b and 4b, the locking member 6 on one side of the through-aperture 8 is connected to the slide 14 extending outwardly on the other side of the through-aperture 8 and the locking member 7 is connected to the slide 13. Consequently, when the outer ends 13a,14a are pushed towards each other, the locking members 6,7 are pushed away from each other, the springs 11,12 are compressed, and the through-aperture 8 is opened, as shown in Figure 3b. When the outer ends 13a,14a are released, the

locking members 6,7 automatically move towards each other by the action of the springs 13,14 and thereby substantially close the through-aperture 8, as shown in Figure 4b. The extent of movement of the locking members 6,7, and thus the extent to which the through-aperture 8 is opened and closed, is defined by a stop member 15 located in an aperture 16 formed in each locking member 6,7.

The inner ends 9,10 of the locking members 6,7 are shaped to receive a cable spade 17 comprising a first part 18 having an aperture 19 for attachment of the suspension cable 4, and a second part 21 for insertion into the through-aperture 8. The second part 21 has a generally triangular head 22, which is shaped to cooperate with the inner ends 9,10 of the locking members 6,7 and a neck 23, which is dimensioned to engage between the inner ends 9,10 when the through-aperture 8 is closed.

The harness plate 5 is intended to be rotatably mounted to the harness 1,2 so that the harnessed person can perform somersault movements whilst suspended by the cable 4. To this end, the plate 5 can rotate about a central hub 24 and the plate includes a stop member 25 which is biased by a compression spring 26 to locate in a notch 27 in the hub 24 whenever the cable spade 17 is not inserted through the through-aperture 8. This stop member 25 thus inhibits rotation of the plate 5 to facilitate insertion of the spade 17 into the through-aperture 8.

When the spade 17 is not inserted in the through-aperture 8, the locking members 6,7 are in the positions shown in Figures 4a and 4b, in which they are resiliently biased towards substantially closing the through-aperture 8. When the spade 17 is required to be inserted into the through-aperture, the front end of the spade head 22 pushes against the inner ends 9,10 of the locking members 6,7 which causes the locking members 6,7 to move outwardly against the bias of the compression springs 11,12. Once the head 22 has passed through the through-aperture 8, the springs 11,12 cause the locking members 6,7 to return to their original

positions, which causes the inner ends 9,10 of the locking members to engage around the neck 21 of the spade 17 and thereby securely retain the spade. It can be seen from Figure 4a that, when the head 22 has passed through the through-aperture 8, its front end pushes the stop member 25 outwardly against the action of the spring 26, so that the stop member disengages from the notch 27 and thereby releases the plate 5 to enable it to rotate about the hub 24.

10 In order to release the cable spade 17 from the locking mechanism, the finger grips on the outer ends 13a,14a of the slides 13,14 are squeezed towards each other, which thus causes the locking members 6,7 to retract, as shown in Figure 3b, and open the through-aperture 8. Removal of the
15 spade 17 from the locking mechanism causes the stop member 25 to move, under the action of the spring 26, into engagement again with the notch 27 and thereby inhibit rotation of the plate 5. Once the spade 5 is removed and the outer ends 13a,14a have been released, the locking
20 members 6,7 will return, by the action of the springs 11,12, to their original positions in which the through-aperture 8 is substantially closed.

A second embodiment of the invention is shown in Figures 5 and 6, in which like parts are labelled with like
25 reference numerals with respect to Figures 3 and 4. In this embodiment, the harness plate 5 is provided with two locking mechanisms, such that the two through-apertures 8 are radially aligned with each other. This arrangement therefore enables two persons to be supported by the same
30 harness plate, with one person suspended below the other person. In this arrangement, the upper cable 4 is connected to an overhead support mechanism (not shown) and the lower cable 4 is connected to another harness plate (not shown) secured to the harness of the lower person. This embodiment
35 is advantageous in that it enables two persons to perform complex manoeuvres and choreography together without any entangling of the cables. Clearly, this embodiment could be

used by just one person if desired, in which case the cable spade would be inserted into the through-aperture 8 adjacent the stop member 26 if rotation of the plate 5 is required.

5 The present invention is advantageous in that it enables the cable spade to be quickly and discreetly inserted into the locking mechanism using a single hand and also enables single-handed release of the cable spade by squeezing together the locking members. Consequently, attachment and detachment of the cables can be more easily
10 incorporated into the choreography of the performers in an unobtrusive manner.

Modifications may be made to the specific embodiments described above, as will be readily apparent to those skilled in the art, without departing from the invention as
15 defined in the accompanying claims. For example, the harness plate is illustrated as generally circular. However, it could be any suitable shape, but is preferably rotationally symmetrical so that its rotation would be unobtrusive during its use on stage. Furthermore, in the
20 second illustrated embodiment, a stop member to inhibit rotation of the harness plate may be located adjacent each through-aperture, instead of just one of the through-apertures.

CLAIMS

1. Apparatus for suspending a load, in particular a person, from a cable, said apparatus comprising:-

5 a harness plate adapted to be secured to a harness for supporting said load, said harness plate including a locking mechanism comprising at least one locking member, a through-aperture defined by said at least one locking member, resilient means arranged to resiliently bias said at least one locking member to substantially close said
10 through-aperture, and user-operable means arranged to move said at least one locking member against the bias of said resilient means; and

cable attachment means having a first part adapted to be attached to said cable and a second part shaped for
15 insertion into said through-aperture and retention therein by said at least one locking member,

whereby insertion of said second part initially moves said at least one locking member against the bias of said resilient means to open said through-aperture and then
20 permits said resilient means to return said at least one locking member so as to securely retain said cable attachment means in said through-aperture, said cable attachment means being releasable from said through-aperture by said user-operable means.

25 2. Apparatus as claimed in claim 1, wherein said locking mechanism comprises two locking members adapted to move towards and away from each other and being spaced apart so as to form said through-aperture therebetween.

30 3. Apparatus as claimed in claim 2, wherein said resilient means are adapted to bias said locking members towards each other to substantially close said through-aperture and said user-operable means are adapted to move said locking members apart against the bias of said resilient means.

4. Apparatus as claimed in claim 3, wherein the locking members are located on first and second sides of said through-aperture respectively, and the user-operable means comprise slidable members connected to said locking members and extending outwardly with respect to said plate, the slidable member connected to the locking member on said first side extending outwardly on said second side and the slidable member connected to the locking member on said second side extending outwardly on said first side, such that sliding said slidable members towards each other causes said locking members to move away from each other and thereby to open said through-aperture.

5. Apparatus as claimed in any preceding claim, wherein said second part of said cable attachment means has a substantially triangular head and a neck such that said head can be pushed through said through-aperture, and said locking members are resiliently biased to engage against said neck to securely retain said cable attachment means.

6. Apparatus as claimed in any preceding, wherein said harness plate has a rotationally symmetrical shape and is adapted to be rotatably mounted on said harness, and means are provided to inhibit rotation of said plate unless said cable-attachment means are inserted in said through-aperture.

7. Apparatus as claimed in claim 6, wherein said means to inhibit rotation comprises a stop member resiliently biased to inhibit said rotation, said cable attachment means being adapted to move said stop member against the bias of said resilient means to release said plate for rotation.

8. Apparatus as claimed in any preceding claim, wherein two of said locking mechanisms are provided on opposite sides of said harness plate, such that two loads can be suspended one above the other.

9. Apparatus for suspending a load, in particular a person, from a cable, substantially as herein described with reference to the accompanying drawings.

- 11 -

CLAIMS

1. Apparatus for suspending a load, in particular a person, from a cable, said apparatus comprising:-

a harness plate adapted to be secured to a harness for supporting said load, said harness plate including a locking mechanism comprising at least one
5 locking member, a through-aperture defined by said at least one locking member, resilient means arranged to resiliently bias said at least one locking member to substantially close said through-aperture, and user-operable means arranged to move said at least one locking member against the bias of said resilient means; and

10 cable attachment means having a first part adapted to be attached to said cable and a second part shaped for insertion into said through-aperture and retention therein by said at least one locking member, whereby insertion of said second part initially moves said at least one locking member against the bias of said resilient means to open said through-aperture and then permits said resilient
15 means to return said at least one locking member so as to securely retain said cable attachment means in said through-aperture, said cable attachment means being releasable from said through-aperture by said user-operable means;

wherein said harness plate is adapted to be rotatably mounted on said harness, and means are provided to inhibit rotation of said harness plate unless
20 said cable-attachment means are inserted in said through-aperture.

2. Apparatus as claimed in claim 1, wherein said harness plate has a rotationally symmetrical shape.

25 3. Apparatus as claimed in claim 1 or 2, wherein said means to inhibit rotation comprises a stop member resiliently biased to inhibit said rotation, said cable attachment means being adapted to move said stop member against the bias of said resilient means to release said harness plate for rotation.

-12-
101

4. Apparatus as claimed in any preceding claim, wherein said locking mechanism comprises two locking members adapted to move towards and away from each other and being spaced apart so as to form said through-aperture therebetween.

5

5. Apparatus as claimed in claim 4, wherein said resilient means are adapted to bias said locking members towards each other to substantially close said through-aperture and said user-operable means are adapted to move said locking members apart against the bias of said resilient means.

10

6. Apparatus as claimed in claim 5, wherein the locking members are located on first and second sides of said through-aperture respectively, and the user-operable means comprise slidable members connected to said locking members and extending outwardly with respect to said plate, the slidable member connected to the locking member on said first side extending outwardly on said second side and the slidable member connected to the locking member on said second side extending outwardly on said first side, such that sliding said slidable members towards each other causes said locking members to move away from each other and thereby to open said through-aperture.

20

7. Apparatus as claimed in any preceding claim, wherein said second part of said cable attachment means has a substantially triangular head and a neck such that said head can be pushed through said through-aperture, and said locking members are resiliently biased to engage against said neck to securely retain said cable attachment means.

25

8. Apparatus as claimed in any preceding claim, wherein two of said locking mechanisms are provided on opposite sides of said harness plate, such that two loads can be suspended one above the other.

-13-
28

9. Apparatus for suspending a load, in particular a person, from a cable, substantially as herein described with reference to the accompanying drawings.



Application No: GB 9902916.7
Claims searched: 1-8

Examiner: Philip Silvie
Date of search: 17 May 1999

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.Q): E2A ACAK

Int Cl (Ed.6): A44B 11/25; A61H 3/00; A63J 5/12

Other:

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	GB 2 182 094 A (FOY) see whole document	1
X	GB 1 528 750 A (BRITAX) see page 2, lines 7-12	1-3
X	GB 1 448 526 A (LINDBLAD) see fig. 2	1-3,5
X	GB 0 861 465 A (MARTIN) see page 2, lines 84-96	1-6
X	US 4 587 695 A (IRVIN) see fig. 1	1-3,5

X Document indicating lack of novelty or inventive step
Y Document indicating lack of inventive step if combined with one or more other documents of same category.

& Member of the same patent family

A Document indicating technological background and/or state of the art.
P Document published on or after the declared priority date but before the filing date of this invention.
E Patent document published on or after, but with priority date earlier than, the filing date of this application.